

REED SWITCH

ORD2211H

Lamp load, long lead-type


■ GENERAL DESCRIPTION

The ORD2211H is a long lead, single contact reed switch designed for direct opening or closing lamps of 12V - 3.4W. The contacts are sealed within the glass tube with inert gas to maintain contact reliability.

■ FEATURES

- (1) Hermetically sealed within a glass tube with inert gas, reed contacts are not influenced by the external atmospheric environment.
- (2) Quick response
- (3) Comprising of operating parts and electrical parts arranged coaxially, reed switches are suited to high-frequency applications.
- (4) Compact and light weight.
- (5) Superior corrosion resistance and wear resistance of the contacts assures stable switching operation and long life.
- (6) Economically and easily becomes a proximity switch when paired with a magnet.

■ EXTERNAL DIMENSIONS (Unit: mm)

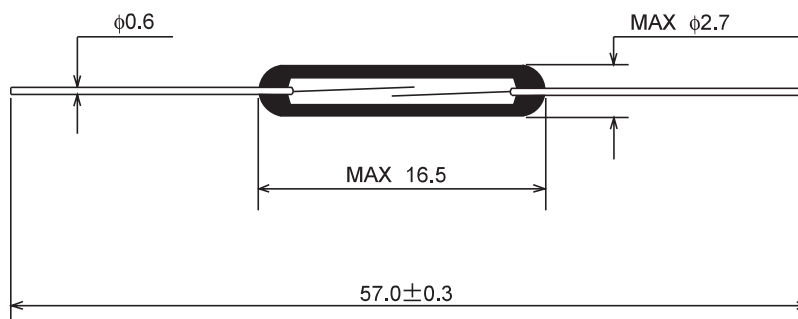

■ APPLICATIONS


- Automotive electronic devices
- Control equipment
- Communication equipment
- Measurement equipment
- Household appliances

■ ELECTRICAL CHARACTERISTICS


Parameter	Rated Value	Unit
Pull-in Value (PI)	20~40	AT
Drop-out Value (DO)	8min	AT
Contact Resistance (CR)	100max	mΩ
Breakdown Voltage	200min	VDC
Insulation Resistance	10 ⁹ min	Ω
Electrostatic Capacitance	0.3max	pF
Contact Rating	50 (12V-3.4W lamp)	VA
Maximum Switching Voltage	100 ($\frac{DC}{AC}$)	V
Maximum Switching Current	0.5 (Inrush 3A)	A
Maximum Carry Current	2.5	A

3


(1) Pull-in Value vs. Drop-out Value

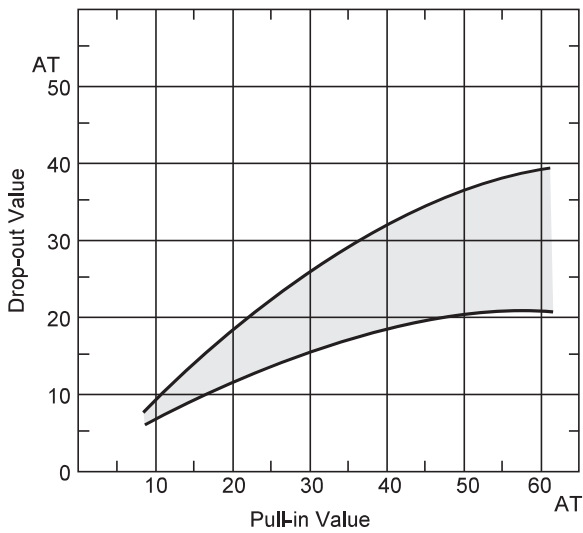


(2) Contact Resistance

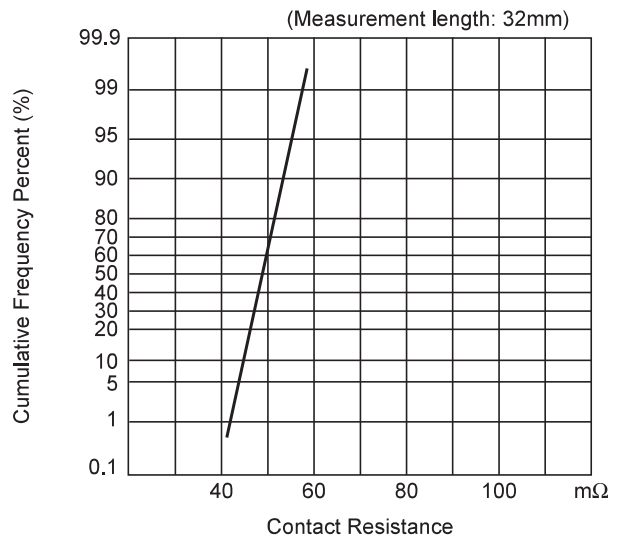


(3) Breakdown Voltage

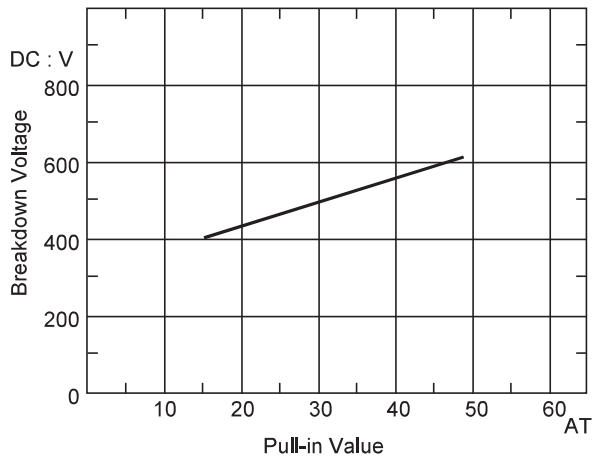

(4) Insulation Resistance

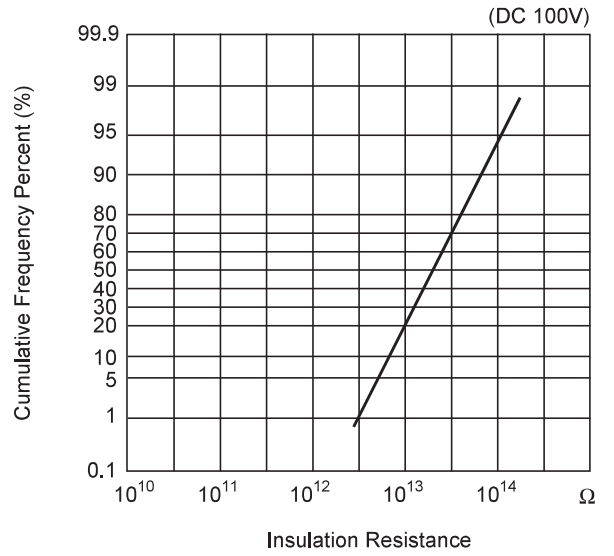


(5) Electrostatic Capacitance

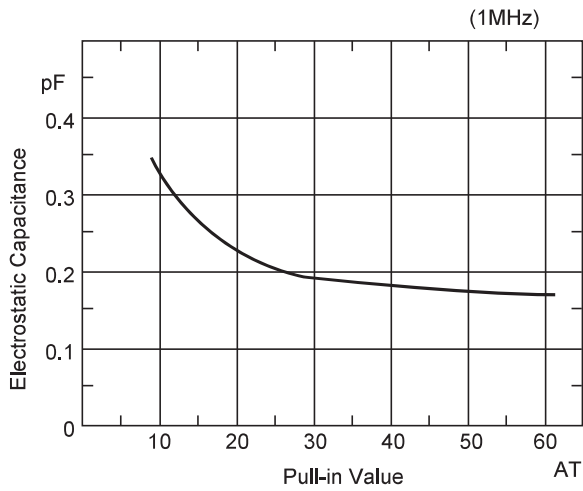


■ OPERATING CHARACTERISTICS

Parameter	Rated Value	Unit
Operate Time	0.6max	ms
Bounce Time	0.4max	ms
Release Time	0.05max	ms
Resonant Frequency	4600±400	Hz
Maximum Operating Frequency	500	Hz


(1) Operate Time

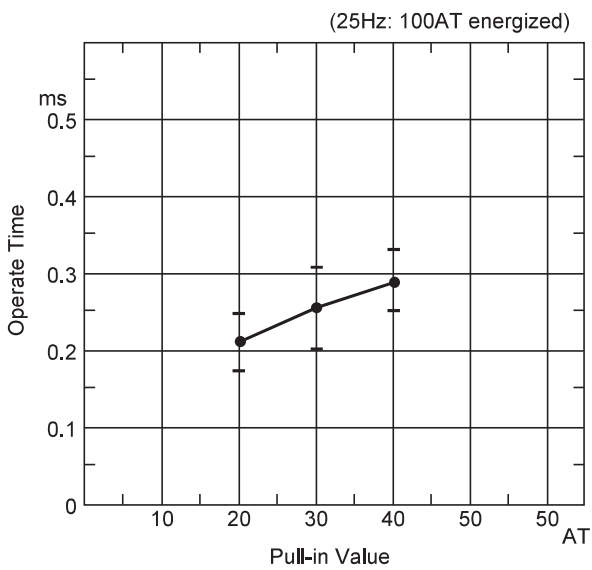


(2) Bounce Time

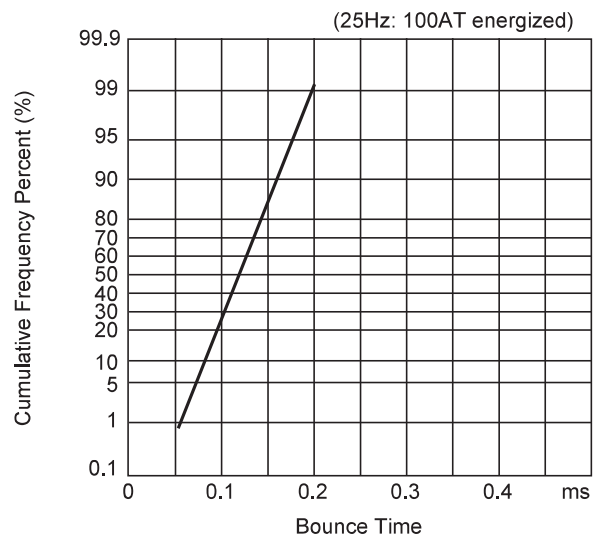

(3) Release Time

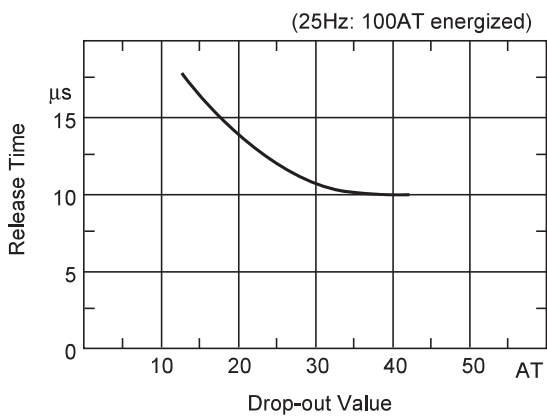


(4) Resonant Frequency

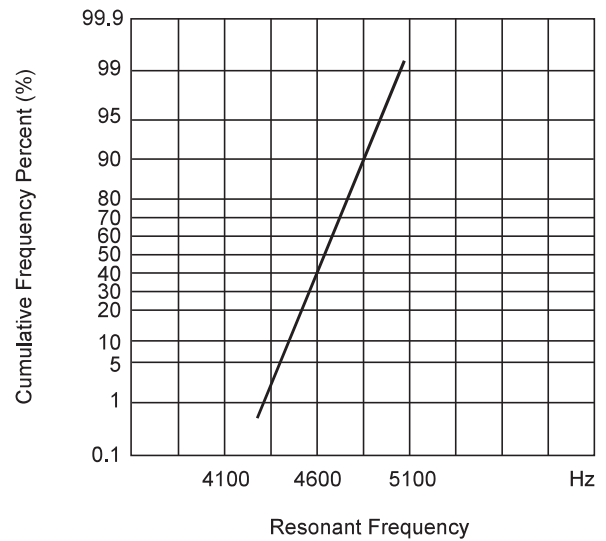


3

MECHANICAL CHARACTERISTICS

(1) Lead Tensile Test (Static Load)

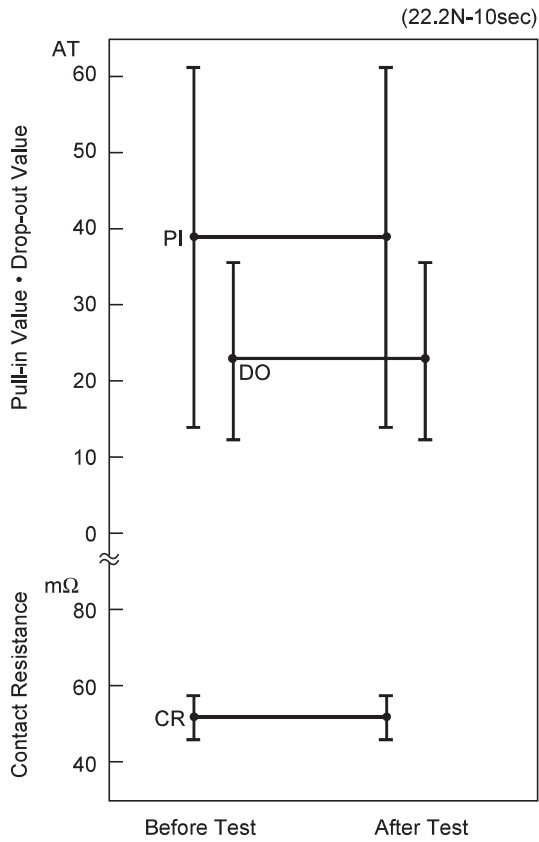


(2) Lead Tensile Strength

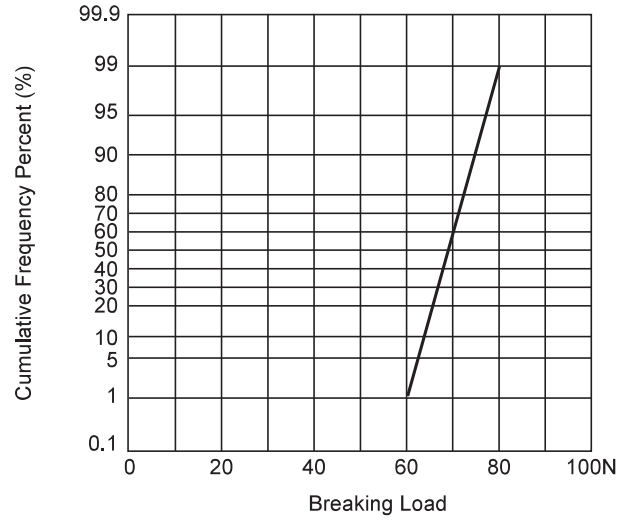


3

ENVIRONMENTAL CHARACTERISTICS


(1) Temperature Characteristics

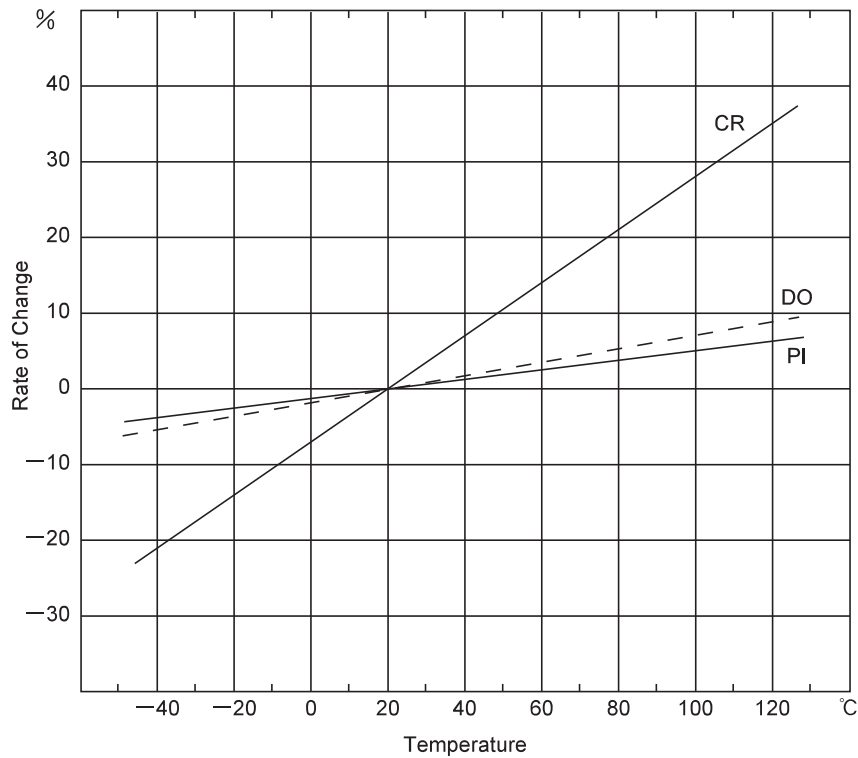


(2) Temperature Cycle

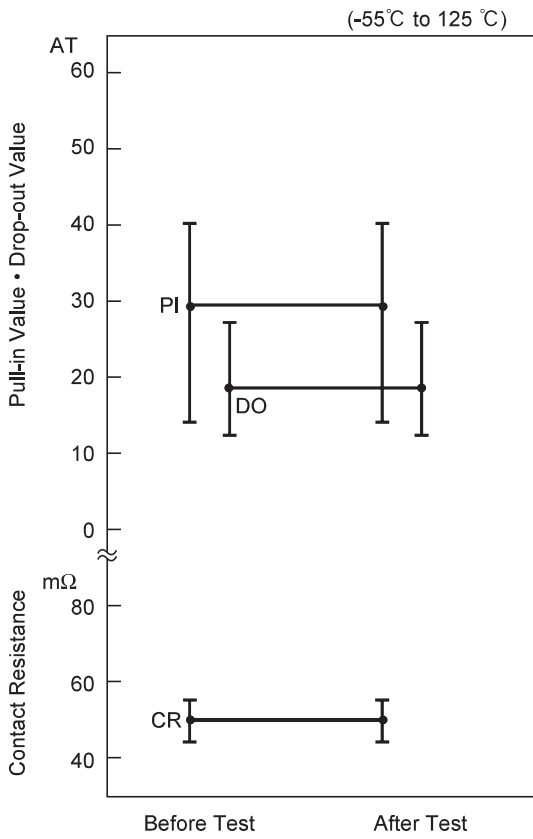


(3) Temperature and Humidity Cycle

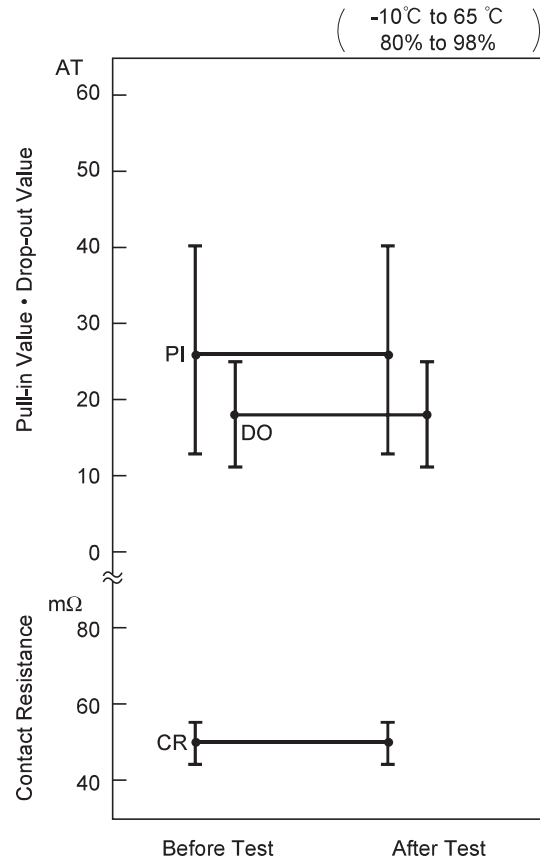

(4) High Temperature Storage Test

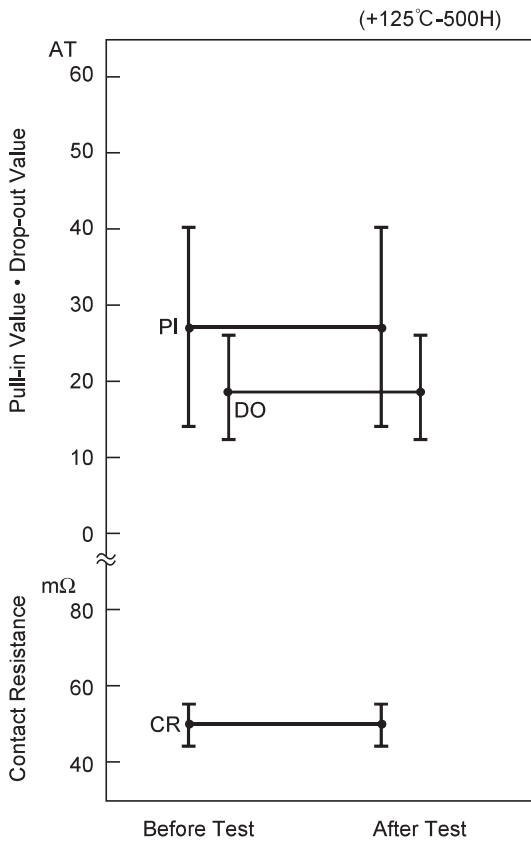


(5) Low Temperature Storage Test

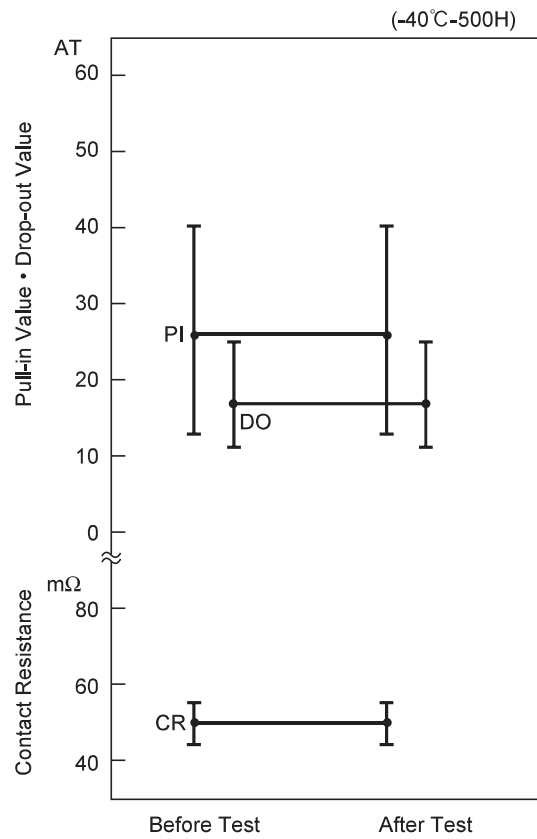


3

(6) Shock Test

1) Electrical Characteristics

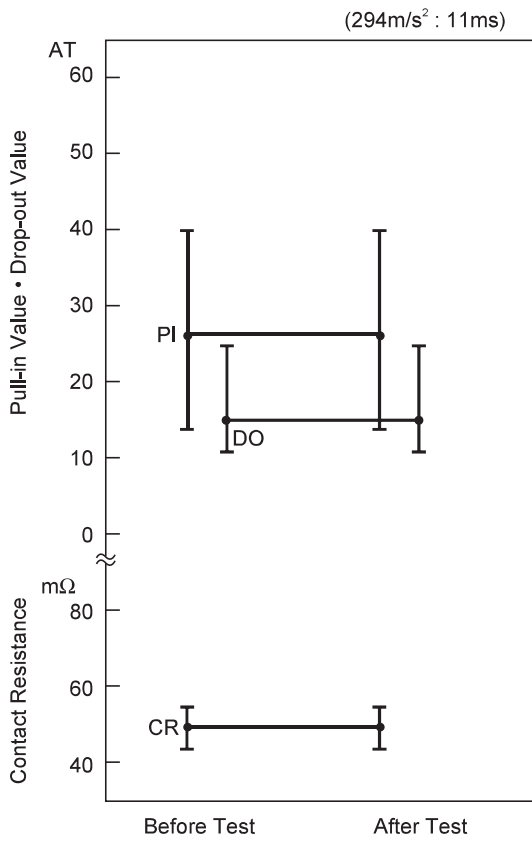

2) Misoperation Area

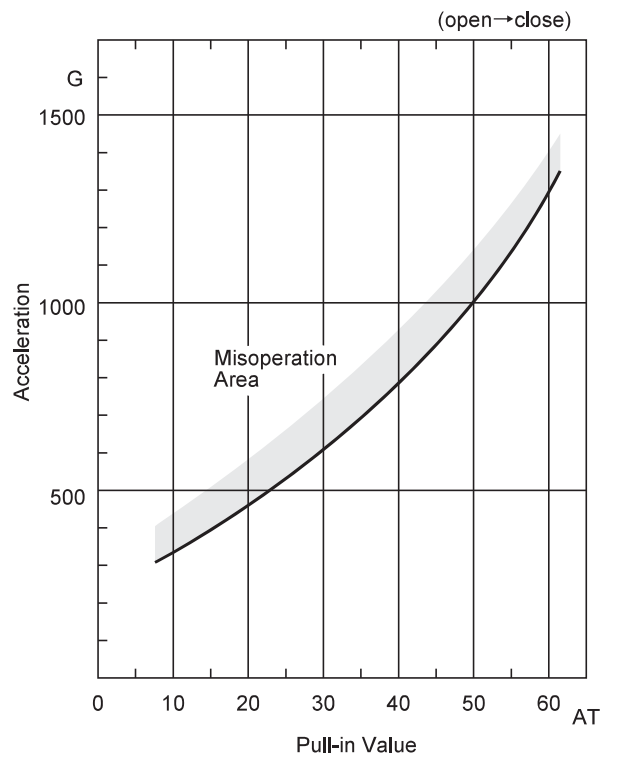

(7) Vibration Test

